


RTD Probe with Protection Head

General Specifications:

- RTD Pt100 DIN standard element
- Temperature range from -190 to +260°C
- Sheath materials 304SS and 316SS
- Various terminal heads, (Bakelite, Aluminium, Stainless Steel, Polypropylene)
- Optional head-mount transmitter

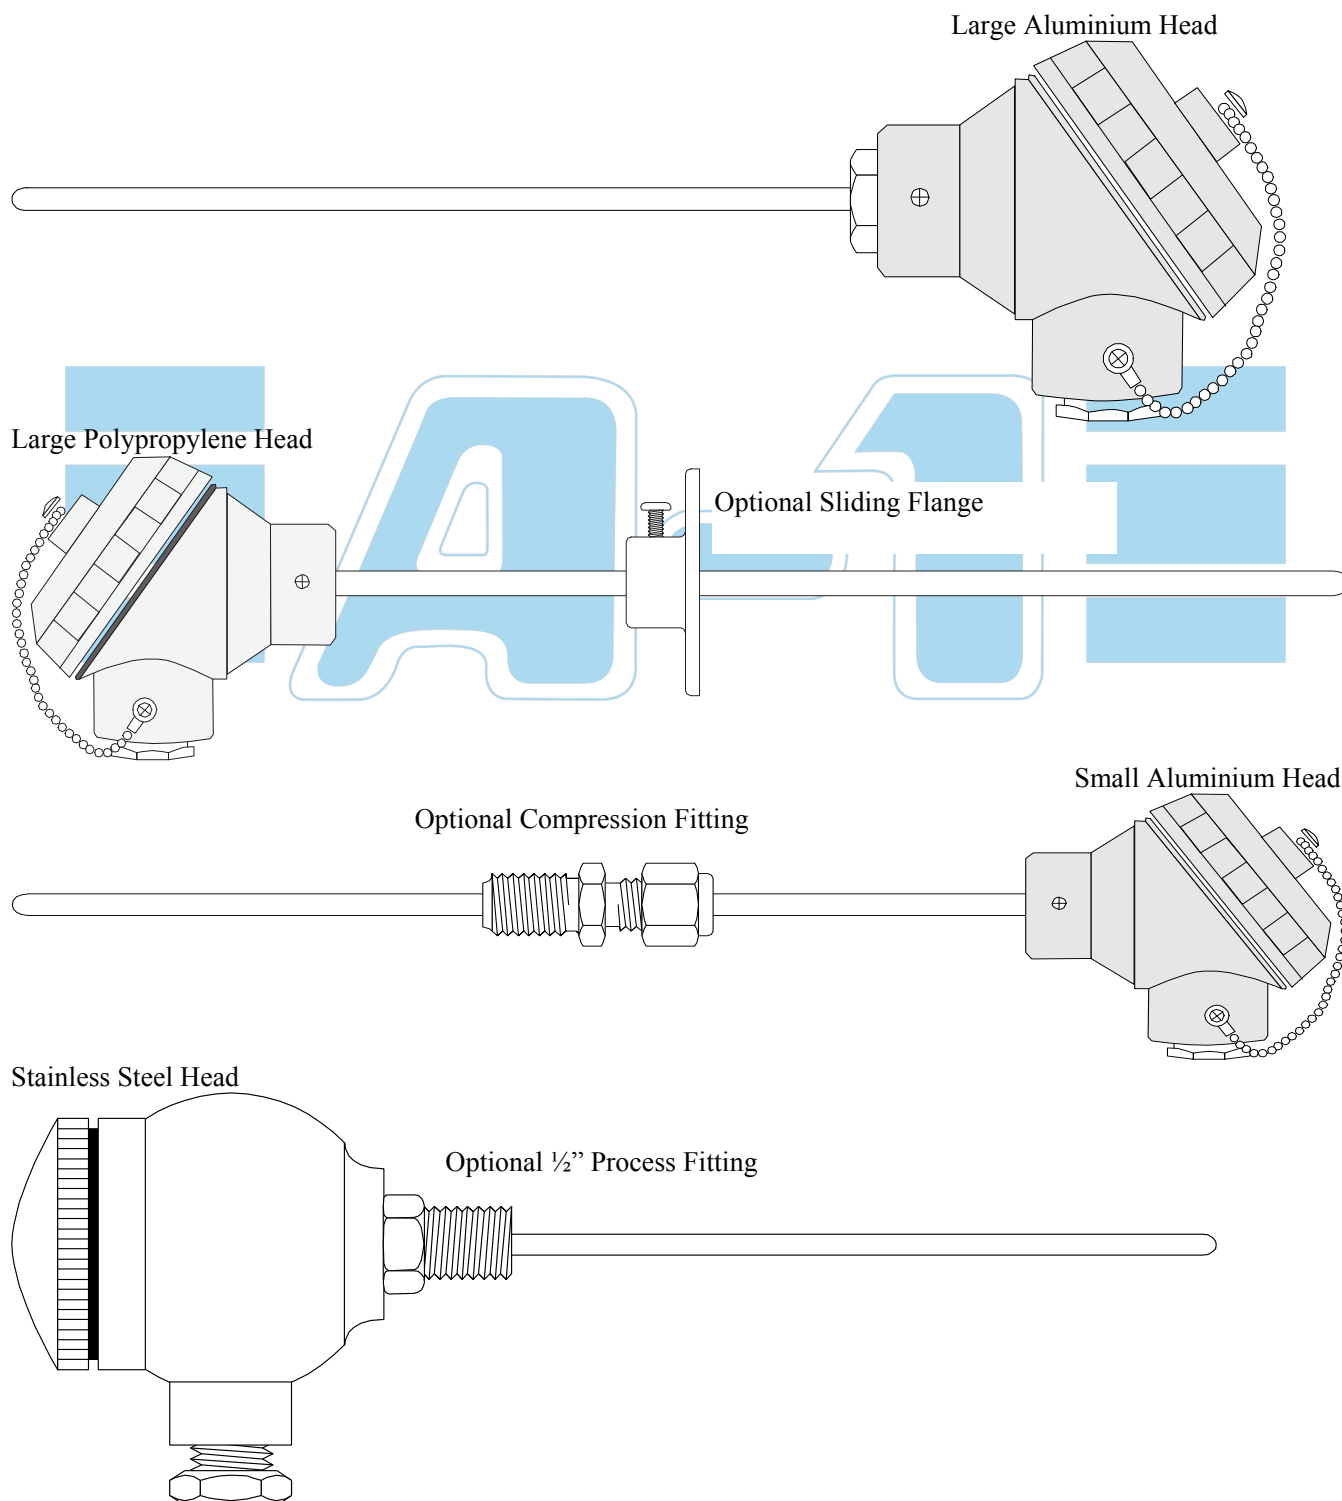

RTD Probe with Protection Head

Item	Code				Specification
Model	RH-				
Element		S			Single
		D			Duplex
		X			Others
Outer Diameter		6.4-			Millimetres (Standard, 304SS) ^{*1}
		X-			Other
Sheath Length					Millimetres
Protection Head			SA		Small Aluminium
			SB		Small Bakelite
			LA		Large Aluminium
			LB		Large Bakelite
			LP		Large Polypropylene
			SS		Stainless Steel
Transmitter			N		None
			TX		Head-Mount Transmitter ^{*2}
Transmitter Range			N-		None
					See Measuring Range Code
			X-		Other
Accessories			N		None
			S		Stainless Compression Fitting
			B		Brass Compression Fitting
			F		Sliding Flange
			P		½" BSP Process Fitting
			X		Other

^{*1} 316SS material available on request.

^{*2} Fits Large Head only.

Measuring Range Codes

Measuring Range	Code
-50 to +50°C	55
0 to +50°C	05
0 to +100°C	10
0 to +150°C	15
0 to +200°C	20
0 to +250°C	25

Note: The above covers the more common RTD probes. We can supply probes to your particular specification.