


RTD Probe with Protection Head

General Specifications:

- RTD Pt100 DIN Standard Element
- Temperature range from -190 to +500°C
- All Sheath Material 316SS
- Various terminal heads, (Bakelite, Aluminium, Polypropylene, Stainless Steel)
- Optional head-mount transmitter

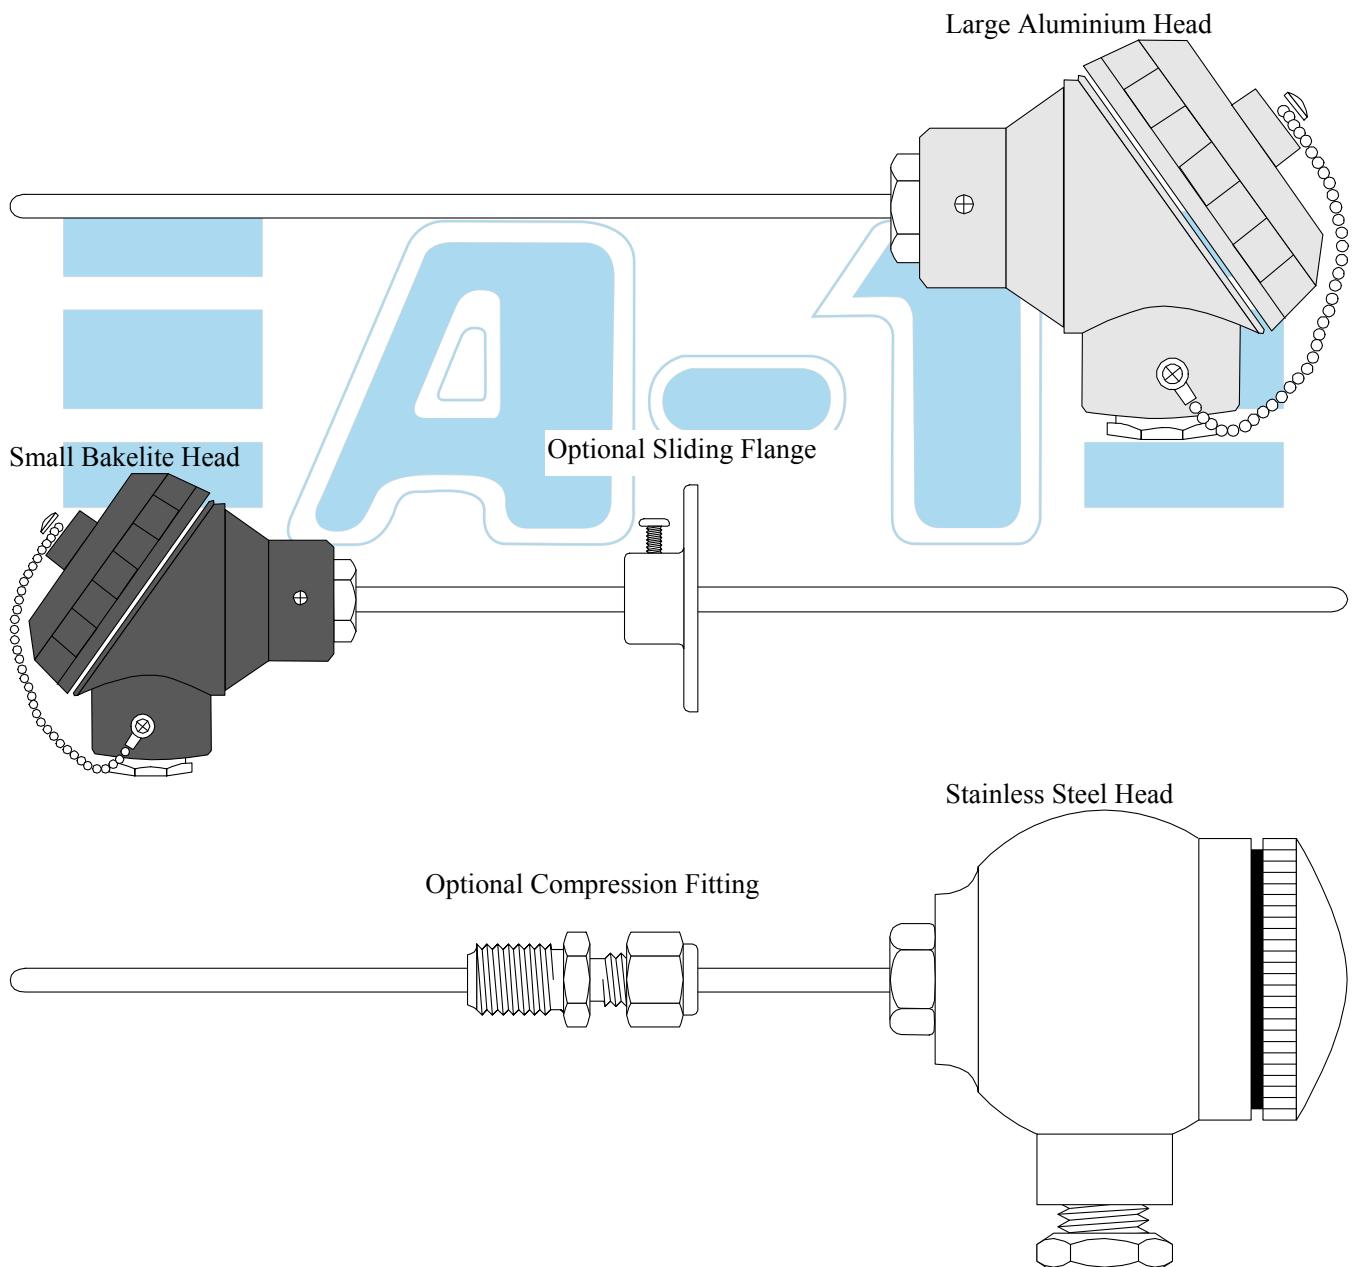

RTD Probe with Protection Head

Item	Code	Specification
Model	MRH-	
Element	S	Single
	D	Duplex
	X	Others
Outer Diameter	6.4-	Millimetres (Standard)
	X-	Other
Sheath Length	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Millimetres
Protection Head	SA	Small Aluminium
	SB	Small Bakelite
	LA	Large Aluminium
	LP	Large Polypropylene
	LB	Large Bakelite
	SS	Stainless Steel
Transmitter	N	None
	TX	Head-Mount Transmitter *
Transmitter Range	N-	None
	<input type="checkbox"/> <input type="checkbox"/>	See Measuring Range Code
	X-	Other
Accessories	N	None
	S	Stainless Compression Fitting
	B	Brass Compression Fitting
	F	Sliding Flange
	X	Other

* Fits Large Head only.

Measuring Range Codes

Measuring Range	Code
-50 to +50°C	55
0 to +50°C	05
0 to +100°C	10
0 to +150°C	15
0 to +200°C	20
0 to +250°C	25
0 to +300°C	30

Note: The above covers the more common RTD probes. We can supply probes to your particular specification.