


RTD Probe with Head and Fitting

General Specifications:

- RTD Pt100 DIN Standard Element
- Temperature range from -190 to +500°C
- All Sheath Material 316SS
- Various terminal heads
- Optional head-mount transmitter

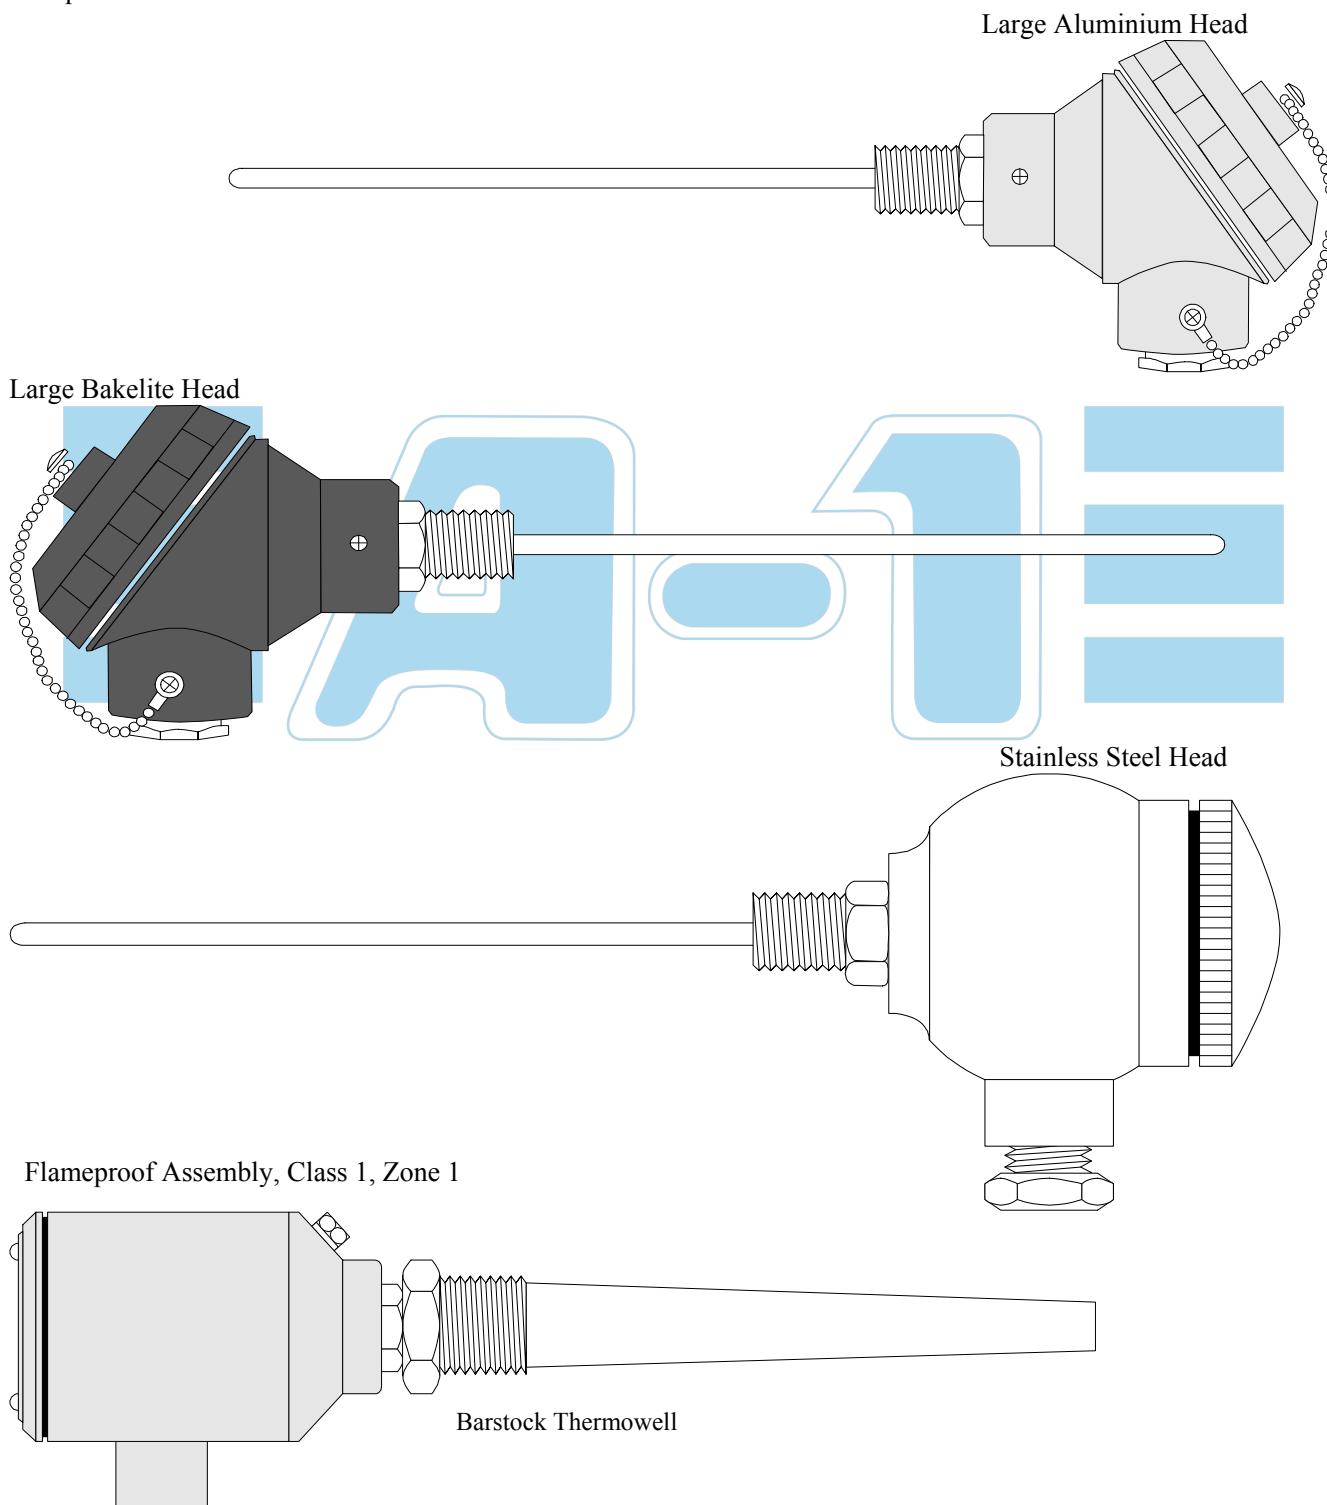

RTD Probe with Head and Process Fitting

Item	Code			Specification	
Model	MRPH-				
Element		S			
		D			
		X			
Outer Diameter		6.4-			
		X-			
Sheath Length				Millimetres	
Sheath Loading			F	Fixed (Standard)	
			S	Spring Loaded	
Protection Head				Large Aluminium	
				Large Bakelite	
				Large Polypropylene	
				Stainless Steel	
				Flame Proof ^{*1}	
Transmitter				None	
				Head-Mount Transmitter ^{*2}	
Transmitter Range				None	
				See Measuring Range Code	
				Other	
Accessories				1/2" BSP Process Fitting	
				Other	

^{*1} Flame Proof Head must be used with a Barstock Thermowell.

^{*2} Fits Large Head only.

Measuring Range Codes

Measuring Range	Code
-50 to +50°C	55
0 to +50°C	05
0 to +100°C	10
0 to +150°C	15
0 to +200°C	20
0 to +250°C	25
0 to +300°C	30

Note: The above covers the more common RTD probes. We can supply probes to your particular specification.